

LED Recessed Light DAHN Datasheet



Number of heads	1
Mounting	Recessed mounting LED
Lamps description	6W 3000K CRI 90+
Luminaire luminous flux	100W/Lm 600Lm
Voltage (V)	180-240
Environment	Indoor, IP65
Notes	LED Recessed Light DAHN has a modern look with a high quality finishing.

OPTICAL

Reflector finish	Aluminum
Aiming	60°
Light distribution symmetry	Symmetric
Beam angle	60° Medium
Color temperature	3000K

ELECTRICAL

Wattage	6W
Transformer mounting	Integral
Transformer type	Electronic
Frequency	50-60HZ
Voltage	180-240V AC

PHYSICAL

Spot diameter (mm)	Ø 45
Construction material	Aluminium
Weight (kg)	0,6
Luminaire lifespan	30 000h
LED module	PHILIPS/BRIDGELUX COB LED 100 lm/W
Driver	LIFUD flicker free
Working temperature	Operation: 0 to +40 °C


Colors:

● Black

Dimensions: 90 x 90mm



CERTIFICATIONS

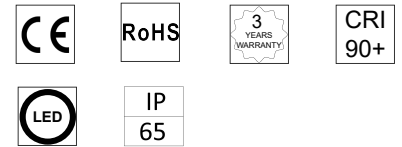

Installation Diagram

